

# DS-KIS604-P(C) Video Intercom Kit

**HIKVISION**<sup>®</sup>



## Key Feature

- Standard PoE
- Noise suppression and echo cancellation
- Configuration remotely via Web
- Stores messages and captured pictures in the TF card
- Remote unlocking via the client software or the mobile client

\*IP video intercom kit for villa or house, only one call button.

\*DS-KV8113-WME1(C) x1

\*DS-KH6320-WTE1 x1

\*PSU x2

\*16GB TF card x1

## Specification

Door station	
Operation system	Embedded Linux operation system
Flash	32 M
RAM	256 M
Door station	
Supplement light	IR supplement
Resolution	Main stream : 1920 × 1080 Sub stream : 640 × 480
Lens	1
WDR	Support
FOV	Horizontal: 124° Vertical: 75°

Video compression standard	H.264
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (more than 80 dB within 30 cm)
Volume adjustment	Adjustable
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Audio intercom	Two-way audio communication
Door station	
User capacity	2000
Door station	
Network protocol	TCP/IP, RTSP
Wi-Fi	Wi-Fi 802.11 b/g/n
Wired network	10/100 Mbps self-adaptive Ethernet
3G/4G	/
Bluetooth	/
Door station	
Network interface	1
RS-485	2
Wiegand	0


Lock control	2
Exit button	2 Max.
Door contact	2
Alarm input	4
Alarm output	0
Power interface	1
TAMPER	1
USB interface	0
TF card	1 (reserved)
<b>Door station</b>	
Button	1
Power consumption	< 10 W
Indicator	3
Power supply	Standard PoE/12 VDC
Working temperature	-40°C to 53°C (-40°F to 127.4°F)
Working humidity	10% to 95%
Dimension	174 mm × 91 mm × 29 mm
Installation	Surface mounting
Application environment	Outdoor
Protection level	IP65, IK08
Weight	380 g
Indicator	3
Power supply	IEEE802.3af, standard PoE 12 VDC
<b>Indoor station</b>	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
<b>Indoor station</b>	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U

Audio compression Rate	64 Kbps
<b>Indoor station</b>	
Wired network	10/100 Mbps self-adaptive
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
<b>Indoor station</b>	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
<b>Indoor station</b>	
Power supply	Standard PoE,12VDC
Power consumption	≤ 6 W
Working temperature	-10°C to 55°C (14°F to 131°F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

## Available Model

DS-KIS604-P(C)

## Dimension

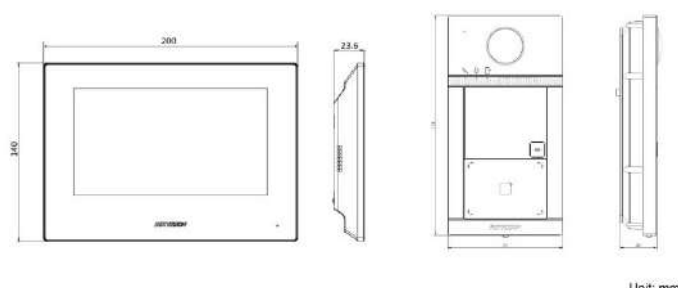

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

